



Europäisches  
Patentamt

European  
Patent Office

Rec'd PCT/NO 14 FEB 2005  
Office européen  
des brevets

10/524422

PCT/IB 03/03351  
08.09.03

Bescheinigung

Certificate

Attestation

REC'D 15 SEP 2003

WIPO PCT

Die angehefteten Unterla-  
gen stimmen mit der  
ursprünglich eingereichten  
Fassung der auf dem näch-  
sten Blatt bezeichneten  
europäischen Patentanmel-  
dung überein.

The attached documents  
are exact copies of the  
European patent application  
described on the following  
page, as originally filed.

Les documents fixés à  
cette attestation sont  
conformes à la version  
initialement déposée de  
la demande de brevet  
européen spécifiée à la  
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

02078359.3

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

R C van Dijk

**PRIORITY  
DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

BEST AVAILABLE COPY



Anmeldung Nr:  
Application no.: 02078359.3  
Demande no:

Anmeldetag:  
Date of filing: 14.08.02  
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Philips Corporate Intellectual Property GmbH  
Weisshausstrasse 2  
52066 Aachen  
ALLEMAGNE  
Koninklijke Philips Electronics N.V.  
Groenewoudseweg 1  
5621 BA Eindhoven  
PAYS-BAS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:  
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.  
If no title is shown please refer to the description.  
Si aucun titre n'est indiqué se référer à la description.)

A method and apparatus for generating an improved image of natural tissue in  
reconstructing body images from 3D-measurement

In Anspruch genommene Priorität(en) / Priority(ies) claimed /Priorité(s)  
revendiquée(s)  
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/  
Classification internationale des brevets:

G06T15/00

Am Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of  
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR IE IT LI LU MC NL PT SE SK TR

A method and apparatus for generating an improved image of natural tissue in reconstructing body images from 3D-measurements

EPO - DG 1

14. 08. 2002

## BACKGROUND OF THE INVENTION

(67)

The invention relates to a method for generating images of human or animal bodies on the basis of 3D-reconstructions from 3D-XRAY or 3D-Computer Tomography measurements, which bodies comprise both natural tissue and one or more high-density objects, such as being furthermore recited in the preamble of Claim 1. A principal category of such objects is represented by intentionally introduced objects for maintaining or improving the quality of human or animal life, such as objects being in the form of surgical implants made from metal or other substances, reconstruction screws, plugs filled into teeth, coils introduced into blood vessels, and various others. A secondary category is without limitation formed by high-density markers used for allowing a registration to match various different data sets. The 3D reconstructing methods recited supra, and possibly others as well, are suffering from the visual artifacts that such high density objects may cause in their neighbourhood, and which artifacts will lessen the quality of the eventual image, and thereby diminish its value for diagnostic, curative and other purposes. In consequence, it would be advantageous to have an approach for suppressing such artifacts. The inventors have recognized the advantage of suppressing the high-density object(s) from the processing in an early stage of the latter.

## SUMMARY TO THE INVENTION

In consequence, amongst other things, it is an object of the present invention to provide an image generating method that does not suffer from the above artifacts from the high-density bodies introduced.

A further object of the present invention is to supplement the image from the natural tissue in a secondary processing stage with the image of such high density object(s) whilst still avoiding the generation of the above artifacts.

Now therefore, according to one of its aspects the invention is characterized according to the characterizing part of Claim 1.

By itself, US-A-4,590,558 discloses a method for removing objects from CT images, wherein an operator defines a "rub-out" region that encompasses the object to be

removed, whereafter the rub-out region is subjected to an averaging function. The operations by the operator clearly necessitate appreciable effort by a skilled worker who must carefully consider the possible location and shape of the high-density object, and on the basis thereof set the rub-out region. The prior art approach will nevertheless be prone to human and other errors, and an automatic procedure would therefore be much preferred.

Furthermore, US-A-6,094,467 requires, next to the standard imaging apparatus an additional hardware facility with many narrow-beam detection facilities for determining the extent, and in particular, the boundaries of high attenuation objects and for thereby reducing the artifacts that the high attenuation objects would cause, without removing the high attenuation objects from the image. The additional plurality of narrow beam detection facilities represent additional cost and additional control operations, and in consequence, the present inventors have undertaken to derive all necessary information from a single measuring system.

The invention also relates to an apparatus being arranged for implementing the method as claimed in Claim 1, and to a computer program and to a computer program product comprising instructions for controlling hardware for thereby being arranged for implementing the method as claimed in Claim 1. Further advantageous aspects of the invention are recited in dependent Claims.

## BRIEF DESCRIPTION OF THE DRAWING

These and further aspects and advantages of the invention will be discussed more in detail hereinafter with reference to the disclosure of preferred embodiments, and in particular with reference to the appended Figures that show:

Figure 1, a flow diagram of a procedure according to the present invention;

Figures 2a-2e, the principle of suppression of the high-density objects;

Figure 3, a 3D reconstruction image of metallic screws in a human knee environment, executed whilst including the suppression and superimposing method for high-density objects according to the present invention.

## DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

Figure 1 illustrates a flow diagram of a procedure according to the present invention. In block 20, the procedure is started and the necessary hardware and software facilities are assigned. In block 22 the measuring apparatus executes a measuring scan. The prime considered technology is 3D-XRAY (3D-RX), but 3D-CT (computer tomography)

technology could be enhanced as well. In block 24, the system determines whether all intended scans have been executed. If no, the next scan is made; if yes, the procedure proceeds to block 26. In block 26, a ramp filter is applied to the projection. The setting of the ramp may be done once and for all, it may be done on the basis of statistical processing, such as based on the assumption that the *area* covered by the high density object(s) is generally small, or it may be done in a heuristic or even intuitive manner, or it could be effected by an operator person. Inasmuch as the high-density objects would generally cause a much greater attenuation than the tissues, the precise setting of the discrimination threshold is not critical.

Next, in block 28, the filtered out high-density object(s) are segmented to get a 3D reconstruction thereof. Next, in block 30 the high-density objects are suppressed in the original projection. Advantageously, they are then replaced by one or more gray values. This may be done by linear interpolation between the neighbouring pixels, by replacing each suppressed object by a single standard value, or by some other appropriate steps. In block 32, the ramp-filtered projections are then segmented a second time, but now without the high-density object(s). A straightforward approach would be to use exactly the same discrimination threshold as for the input values to block 28.

Finally, in block 34, the segmented one or more high-density objects from block 28 are superimposed on the segmentation result of the remainder. Finally, in block 36, the procedure is terminated, and the assigned facilities are relinquished again. The flow chart represents in various respects a simplification. For example, no escape procedure has been shown other than at the successful termination of the processing. Further, a trial and error procedure could be used for effectively setting the ramp threshold.

Figures 2a-2e, illustrate the principle of suppression of the high density objects. The method will be described for 3D-RX. A 3D-imaging modality bases on a number of projections acquired during a rotational run with a motorized C-arm system. Figure 2a shows one simplified projection image. Therein, items 1 to 3 are high-density objects or so-called bullets used for registration of different data sets. After registration, the bullets must be eliminated for a 3D-reconstruction in order to avoid artifacts. When measuring an intensity curve across the projection, at the position of the bullet a signal of high-intensity arises. This signal has to be suppressed and may be filled with gray values derived from the neighbourhood that comprises surrounding structures with lower densities.

The suppression of the high-density object(s) is effected by using ramp-filtered projections instead of the original projections, which at the same time improves and simplifies the reconstruction. In this respect, Figure 2a shows a projection image with bullets

1, 2, 3 clearly visible in the form of black circles. In a first processing step, all projections are ramp-filtered and used for a 3D-reconstruction with the well-known Feldkamp algorithm. Next, in a second step, the bullets, or for that matter, other high-density objects, are segmented in the 3D-reconstruction, resulting in the picture of Figure 2b. The ramp-filtering results in sharper edges of the bullets, and the 3D-reconstruction enhances the contrast. Through so acting, the segmentation of the high-density objects from the surrounding tissue or structures of their neighbourhood can be effected much better. Next, the bullets can be discriminated by a simple threshold, so that in consequence only the bullets themselves are visible in the form of points with encircling rings. The latter represent the shadow of the bullet in question.

Now, in a third processing step, the remaining bullets are forward projected into ramp-filtered versions of the original projections in order to mark the search regions for the respective bullet borders, leading to the result illustrated in Figure 2c. After the above processing, the detected borders of the bullets will be forward projected into the original projections, resulting in the image shown in figure 2d. In the fourth processing step, the bullets are suppressed by substituting them by the gray values of the structures in their surrounding neighbourhood, such as by linear interpolation between the respective entry point and the corresponding exit point of the bullet in question. Subsequently, a new 3D-reconstruction is performed through again applying the Feldkamp algorithm with ramp-filtered projections. Thereby, the bullets are reduced or even eliminated, such also including removal of the artifacts caused by the bullets, leading to the image shown in Figure 2e.

Figure 3 illustrates a 3D reconstruction image of metallic screws in a human knee environment, executed whilst including the suppression and superimposing method for high-density objects according to the present invention. The reconstruction clearly shows the knee joint made up of two major bones and the knee-cap, and also two screws used for clinically fixating bone parts to each other. Furthermore, clearly, no artifacts can be seen in the image. The result is attained through including the high-density suppression method in the 3D-reconstruction. The final image is reconstructed by matching the 3D-data set of the bone structures with the 3D-reconstruction of the segmented screws. Furthermore, the gray values of the screws has been adapted to show both screws and bones at the same time. Such adapting may be represented by reducing the overall dynamic representation of the various objects, and in particular, of the high-density objects. Such simultaneous presentation allows a better diagnosis of the region between the screws and the surrounding bone structures. Artifacts caused by the high-density implants can be much reduced now.

The inventors have found that the results according to the present invention are much better when using ramp-filtered projections in combination with a 3D-reconstruction like through the Feldkamp algorithm. The edges of the high density bodies will generally be much sharper and the contrast is improved. Thereby, a segmentation of the implants from the surrounding structures can be done much better. The segmentation can be easily performed with a simple threshold. This is an important aspect of the present invention, inasmuch as segmentation algorithms are often quite complex and thereby, time-consuming.

## CLAIMS:

14. 08. 2002

(67)

1. A method for generating images of a human or animal body on the basis of 3D-reconstructions from 3D-XRAY or 3D-Computer Tomography measurements, which bodies comprise both natural tissue and one or more high-density objects, said method comprising the steps of executing said measurements, distinguishing said one or more high-  
5 density objects and executing a separating procedure thereon for generating an improved image of regions of said natural tissue, said method being characterized by comprising the steps of:

- applying a ramp filter on such various projection measurements to single out said one or more high-density objects;
- 10 - segmenting said singled-out one or more high-density objects into a separate 3D reconstruction;
- suppressing said reconstructed one or more high-density objects from the original projection measurements;
- and segmenting said projection measurements without said suppressed one or more high-  
15 density objects.

2. A method as claimed in Claim 1, said method comprising the additional step of superimposing said one or more segmented high-density objects onto a segmenting result that is devoid from said suppressed one or more high-density objects.

3. A method as claimed in Claim 1, wherein said one or more high-density objects are suppressed before segmenting whilst executing an appropriate substitution thereof by gray values.

25 4. A method as claimed in Claim 1, furthermore comprising the step of relatively adapting the gray values of the one or more high-density objects and the natural tissue to show both of them at the same time.



5. An apparatus being arranged for implementing a method as claimed in Claim  
1.

6. A computer program comprising instructions for controlling an apparatus for  
5 thereby implementing a method as claimed in Claim 1

7. A computer program product being embedded in a machine-read-only tangible  
medium and containing instructions for controlling a computer-based apparatus for thereby  
implementing a method as claimed in Claim 1.

## ABSTRACT:

A method is disclosed for generating images of a human or animal body on the basis of 3D-reconstructions from 3D-XRAY or 3D-Computer Tomography measurements, which bodies comprise both natural tissue and one or more high-density objects. The method comprises the steps of executing the measurements, distinguishing the one or more high-density objects and executing a separating procedure thereon for generating an improved  
5 image of regions of the natural tissue.

In particular, the method comprises the following steps:

- applying a ramp filter on the various projection measurements to single out the one or more high-density objects;
- 10 - segmenting the singled-out one or more high-density objects into a separate 3D reconstruction;
- suppressing the reconstructed one or more high-density objects from the original projection measurements;
- and segmenting said projection measurements without the suppressed one or more high-  
15 density objects.

Figure 1

EPO - DG 1

14. 08. 2002

(67)

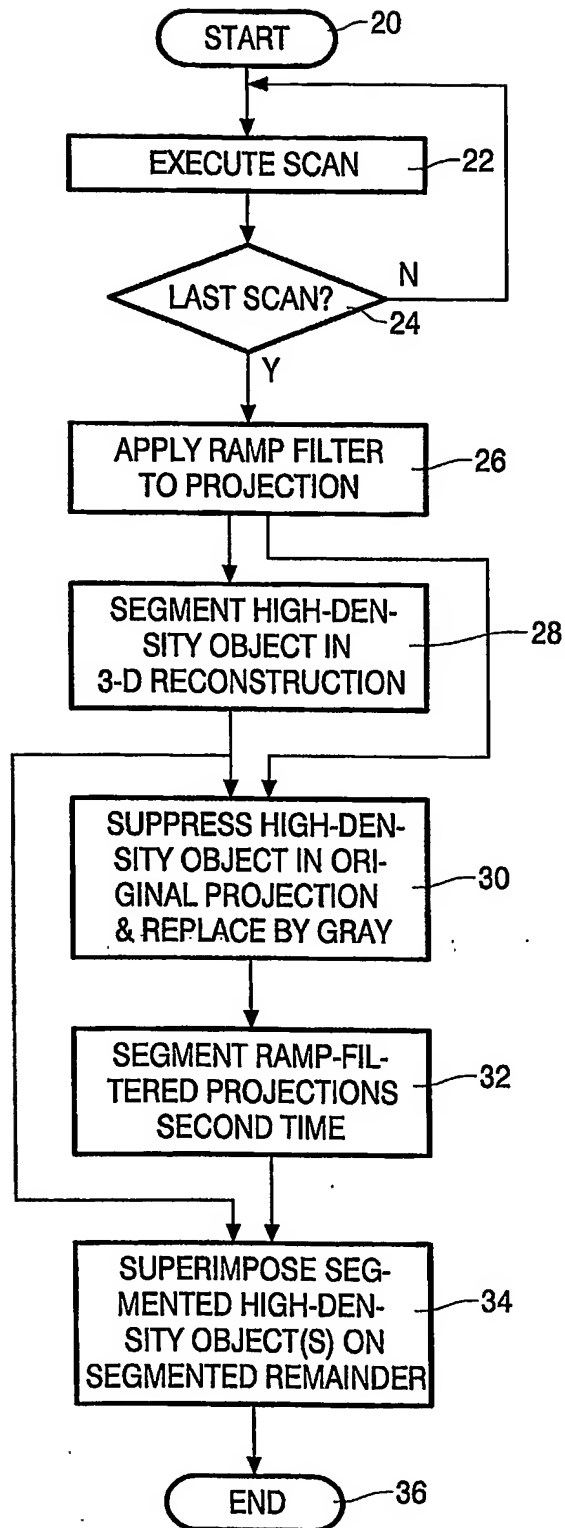


FIG. 1

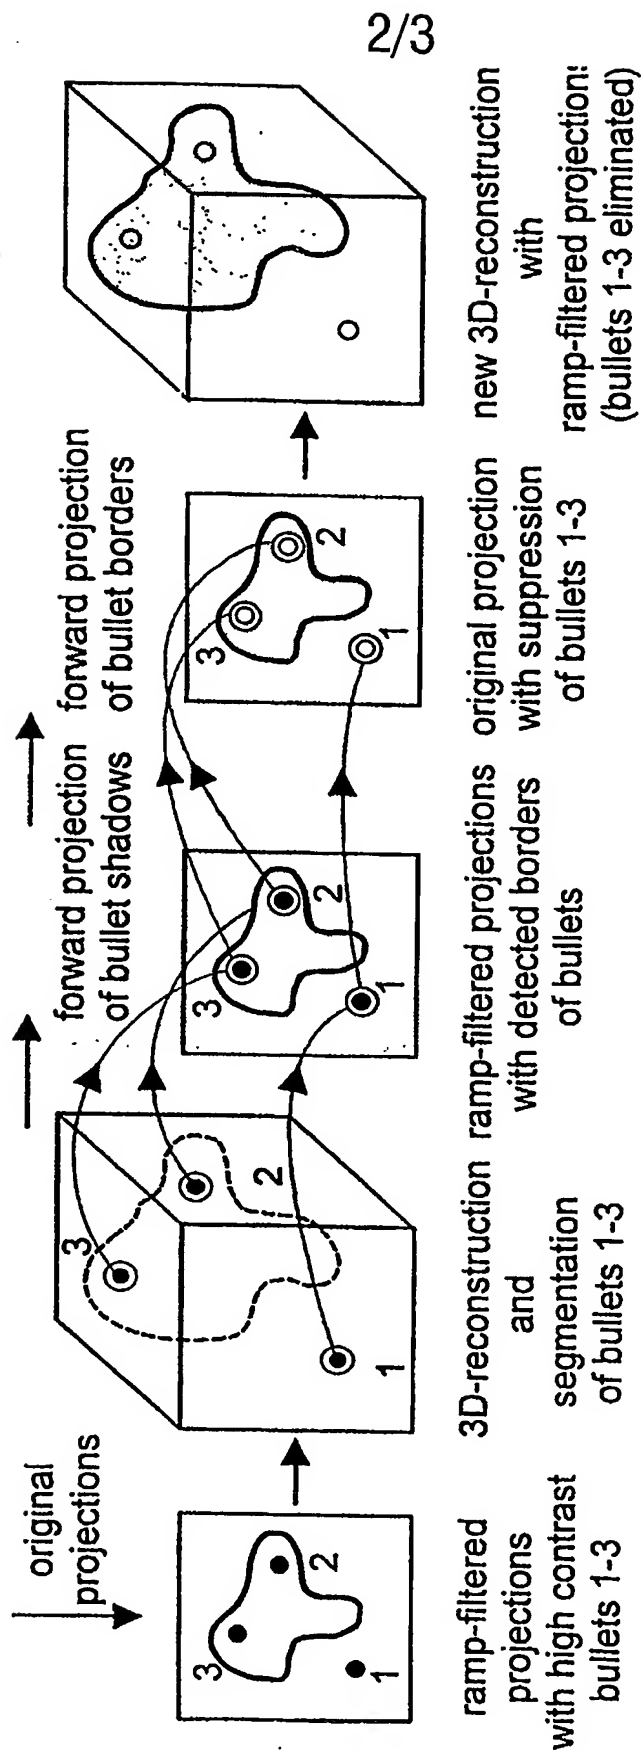


FIG.2a

FIG.2b

FIG.2c

FIG.2d

FIG.2e

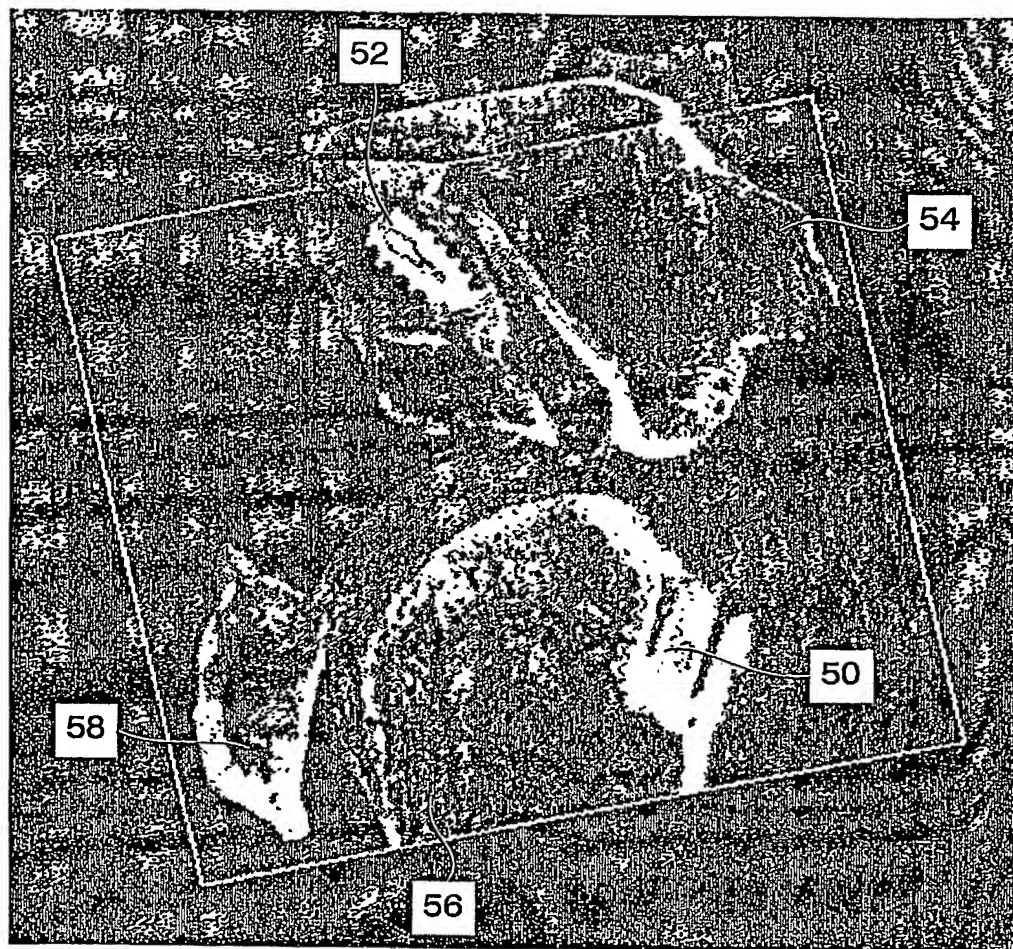


FIG.3

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☐ BLACK BORDERS

☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES

☐ FADED TEXT OR DRAWING

☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING

☐ SKEWED/SLANTED IMAGES

☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS

☐ GRAY SCALE DOCUMENTS

☒ LINES OR MARKS ON ORIGINAL DOCUMENT

☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY

☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**